


WIRING DIAGRAM



- 1 Operator ONDA 801
- 2 Flasing beacon (optional)
- 3 Antenna (with 4,5 coaxial cable)
- 4 Receiving photocell
- 5 Emitting photocell
- 6 Internal keypad (optional)

- 7 Touch-sensitive keypad, card reader or key switch (both optional)
- 8 Electronic unit
- 9 Safety edge
- 10 Main ON/OFF switch (responsibility of installing electrician)

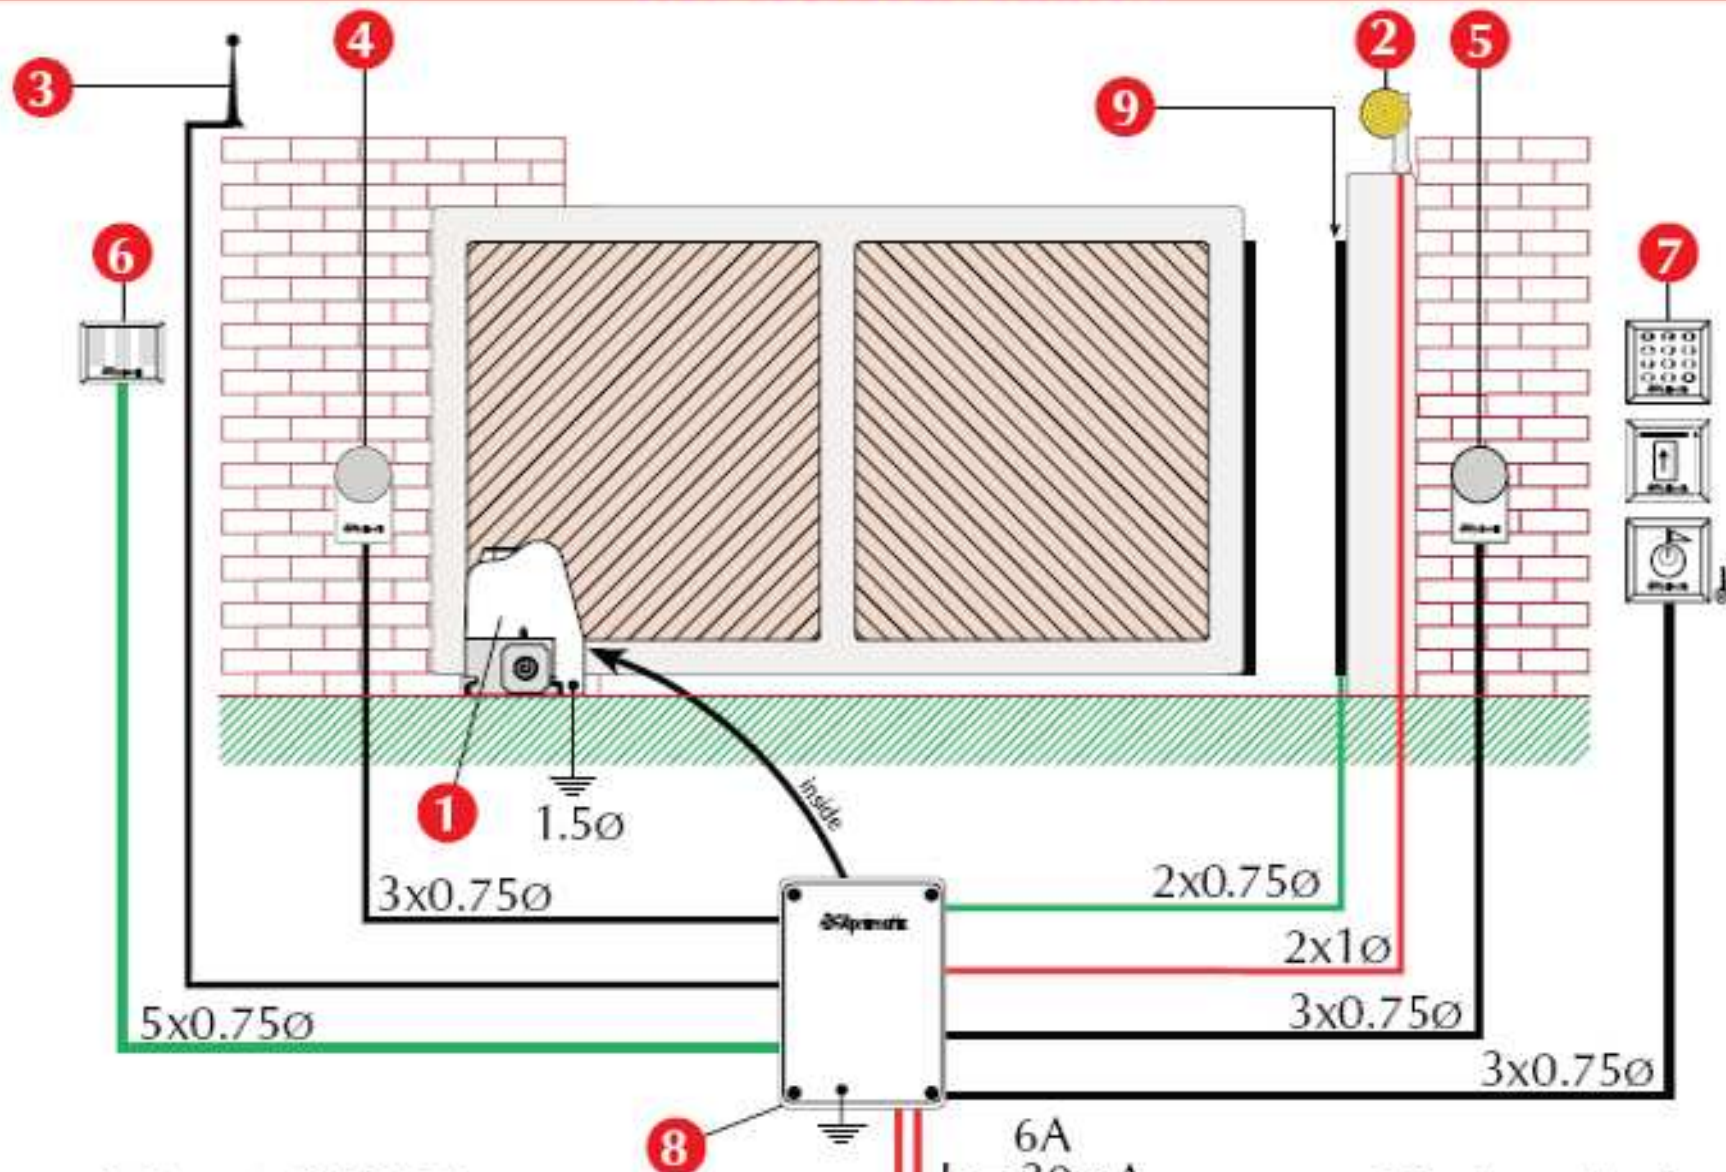